RØDELink

The RØDELink TX-M2 Microphone is a versatile wireless condenser microphone. Transmitting a 128-bit encrypted signal on the license-free 2.4GHz spectrum, the TX-M2 pairs easily with the RX-DESK or RX-CAM Receivers, delivering crystal

- Series II 2.4GHz Digital Transmission
- 128-Bit Encrypted Signal
- High Quality Condenser Microphone
- Up to 100m range (based on optimal environment)
- Power via LB-1 Rechargeable Battery or 2 x AA Batteries
- Low Handling Noise
- Mute Switch
- Designed and Made in Australia











Transmission Type:	2.4GHz fixed frequency agile system
System Dynamic:	118dB range
Range (Distance):	Up to 100m (based in optimal environment)
Frequency Response:	35Hz - 20Hz
Max Input Signal Level:	140 dB SPL
Power Source:	RØDE LB-1 4.2v Lithium-ion Rechargeable Battery or 2x AA Batteries
Antenna:	Diversity antenna
Dimensions:	40mm(W) x 256mm(H) x 40mm(D)
Weight:	222g














LB-1




ZP2

DIMENSIONS

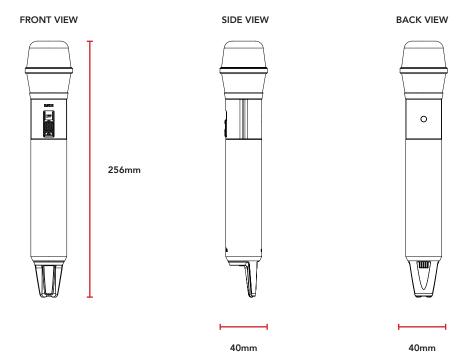

POLAR PATTERN



FREQUENCY RESPONSE

