VIDEOMIC GO

LIGHTWEIGHT DIRECTIONAL MICROPHONE

The VideoMic GO II is a versatile and lightweight shotgun microphone that excels in a range of recording applications. It features a 3.5mm TRS output for use with a camera, plus a digital USB output for recording with mobile devices and computers*. It delivers crisp, clear, directional sound, making it ideal for filmmaking and vlogging, and is also fully compatible with the RØDE Connect podcasting and streaming software for Mac and PC. When used in USB mode, the 3.5mm output doubles as a headphone output for easy monitoring and playback.

- Lightweight shotgun microphone
- 3.5mm TRS output for use with cameras
- Digital USB output for use with mobile devices and computers*
- Compatible with RØDE Connect software










iPhone & Android COMPATIBLE

3.5mm TRS



Acoustic Principle:	Pressure gradient electret condenser
Polar Pattern:	Supercardioid
Frequency Response:	20Hz - 20kHz
Output Impedance:	2Κ2Ω
Signal to Noise Ratio:	79 dBA
Equivalent Noise (A-weighted):	15 dBA
Dynamic Range:	95 dBA Typical
Sensitivity:	-31dBV(28.78mV @ 94dB SPL) ± 1dB @ 1kHz
Max Input SPL:	110 dB SPL
Output Connections:	• 3.5mm TRS • USB-C
Computer Connectivity:	USB-C (USB 2.0)
Simultaneous I/O:	Stereo input and output when in USB mode
Power Requirements:	3.5mm plug-in power 2 - 5VUSB 5V
Bit Depth:	24-bit
Sample Rates:	48 kHz
Minimum OS Requirement:	macOS 10.15Windows 10 (20H2)iOS 14Android 9.0

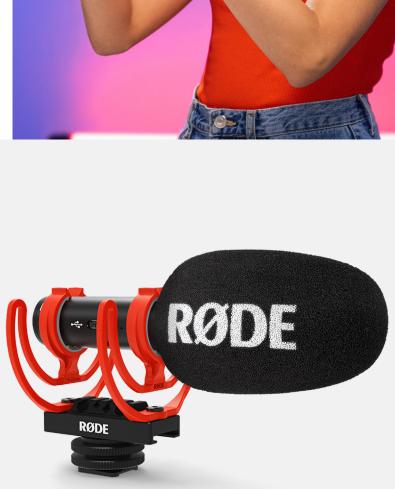




MECHANICAL SPECIFICATIONS


WHATS IN THE BOX

VideoMic GO II: 33 VideoMic GO II and included accessories: 96
VideoMic GO II: Height: 120 Diameter: 21.6
VideoMic GO II and included accessories: Length: 150 Width: 70 Height: 86
WS12, SC14, SC15, SC16, SC17, SC18, SC19, SC20, SC21, SC22, SC23, SC24, SC25, SC26
RØDE ConnectRØDE CentralRØDE Reporter
1 x SC14 TRS-TRS cable1 x foam windshield1 x SM8-R shockmount




DIMENSIONS



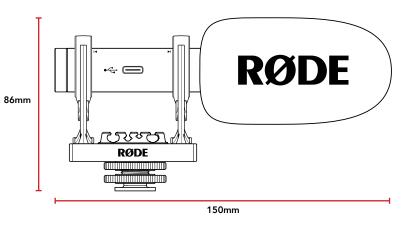

POLAR PATTERN



FREQUENCY RESPONSE

