

The NT5 is a premium ½-inch diaphragm true condenser microphone designed for critical recording. It delivers a smooth, balanced sound with ultra-low self-noise, and its exceptionally accurate cardioid polar pattern and wide frequency response make the NT5 the perfect microphone for a wide range of recording applications.

- Externally biased condenser
- Gold-sputtered 1/2" capsule
- Heavy-duty satin-nickel plated body
- Ultra-low self-noise
- Full frequency response
- Also available in an acoustically matched pair





ACOUSTIC & ELECTRICAL SPECIFICATIONS

Acoustic Principle:	Pressure gradient
Polar Pattern:	Cardioid
Frequency Response:	20Hz - 20kHz
Sensitivity:	-38dB re 1 Volt/Pascal (12 mV @ 94 dB SPL)
Output Impedence:	100Ω
Equivalent Noise:	16dBA
Maximum SPL:	115 dB SPL (1 kHz @ 1m)
Power Requirement:	P48 phantom power
Analog Outputs:	3 pin XLR, balanced output between Pin2 (+), Pin 3 (-) and Pin 1 (ground)
Output Connectivity:	XLR

MECHANICAL SPECIFICATIONS

Weight (grams):	110	
Dimensions (millimetres):	Height: 145 Width: 20 Diameter: 20	

Compatible Accessories for Single Set:

for Matched Pair:

1 x RM5 Mic Clip 1 x WS5 windshield 2 x NT45-O

2 x RM5 Mic Clip 2 x WS5 windshield

1 x NT45-O















1 x RM5




1 x NT45-O




1 x WS5

DIMENSIONS

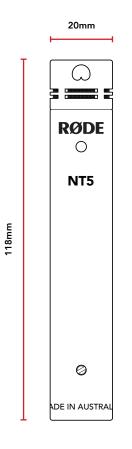

POLAR PATTERN



FREQUENCY RESPONSE

